

## TIGRAY conference table technical characteristics



### General:

They are tables to be installed separately from the seats to straight or curved lines.

Tables consist of the table top, metal legs, front panels, shelves, cable bars and the edge panels.

Optional holes for cables exit or holes with special shape in order to house microphone and translation devices could be opened on the table top.

All metal parts are painted with epoxy powder.

Finishing is to be chosen by the client.

### Table top:

Table top is made of chipboard or MDF with melamine or laminate or veneer finishing. Its total thickness is 25mm.

### Front panels/shelves/edge panels:

They are made similar to the table top. Their total thickness is 18mm.

### Legs:

Legs are made of steel and their number is one for every working seat plus one at the end of a row. Optionally they could be one leg by two working seats. They could have special holes for cables entrance and exit.

## Cable bar system:

Optionally the table could be equipped with a cable bar system that is placed under the table top. The bar is made of steel.

## Other options:

Varnish could be flame retardant.

Metal parts could be electro galvanizes when the table is going to be used at a semi-outdoor place.

## Certifications:

BIRÓ is ISO 9001, ISO 14001 and ISO 45001 certificated.



**EN ISO 9001:2015**




**EN ISO 14001:2015**



**ISO 45001:2018**

## Dimensions:

The table dimensions are according to the specific project and custom needs.

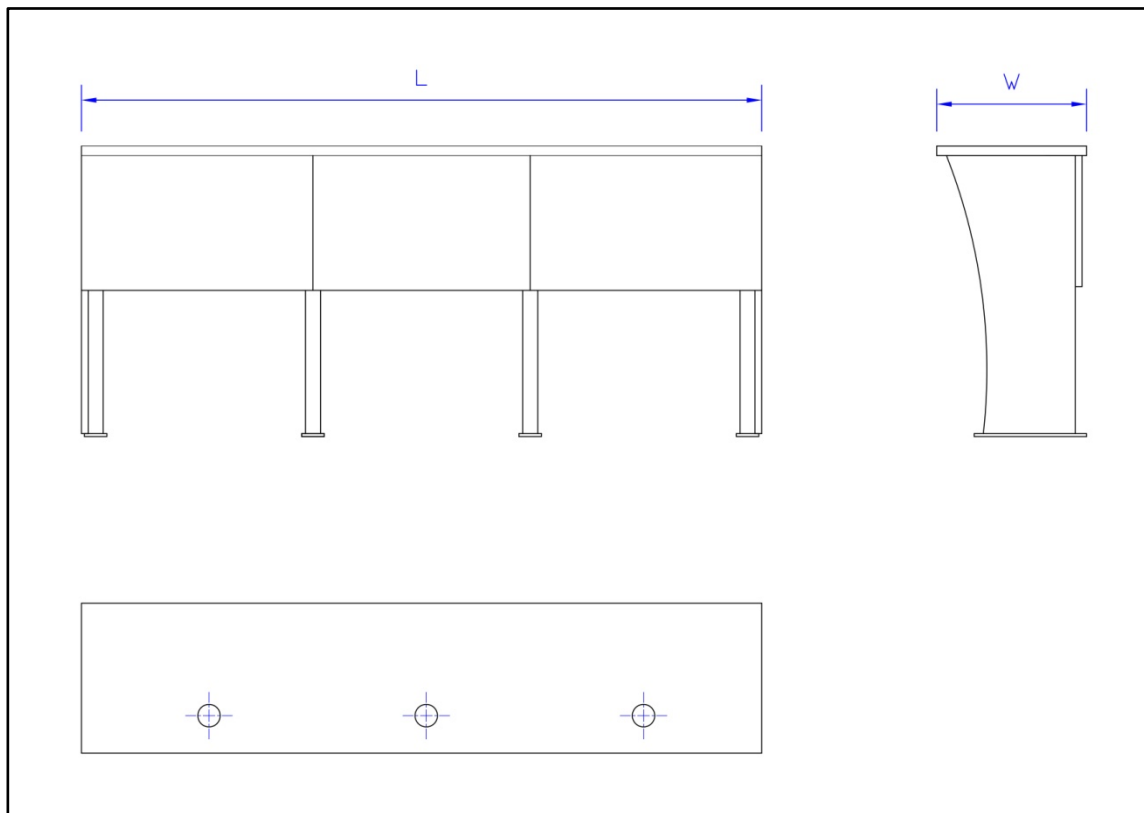

## Indicative table section:

